


LAMIERE STIRATE


EXPANDED METAL
METAL DEPLOYE



DL 0,60	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 0,50	0,18	0,15	0,650

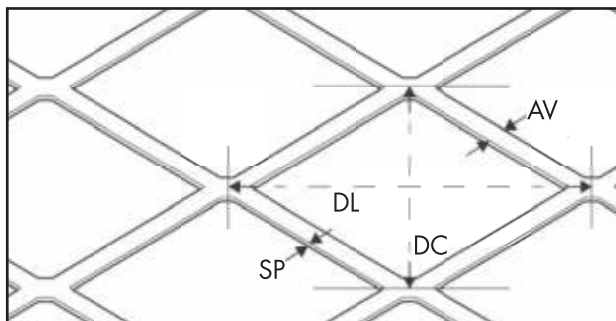

DL 0,85	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 0,65	0,23	0,15	0,700

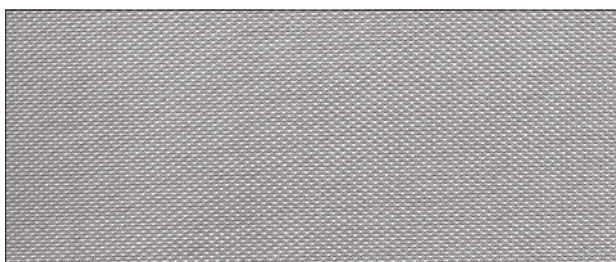

DL 1,5	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 1	0,35	0,15	0,700
	0,30	0,20	1,000
	0,30	0,30	1,500

MAGLIA ROMBOIDALE

DETTAGLI TECNICI


DL= diagonale lunga
DC= diagonale corta
AV= avanzamento
SP= spessore



DL 0,75	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 0,60	0,20	0,15	0,700



DL 1	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 0,75	0,27	0,15	0,750
	0,23	0,20	1,000

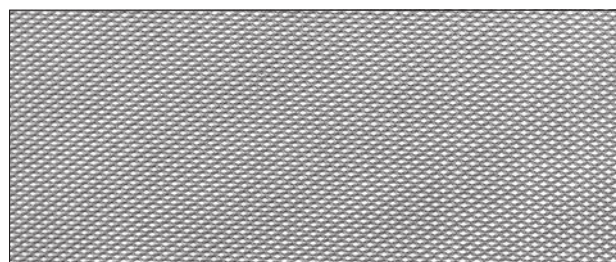


DL 2	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 1,30	0,35	0,15	0,650
	0,35	0,20	0,850
	0,30	0,30	1,100

RHOMBOIDAL MESH MAILLE RHOMBOÏDE

TECHNICAL DETAILS


DL = long diagonal
DC = short diagonal
AV = strand width
SP = thickness

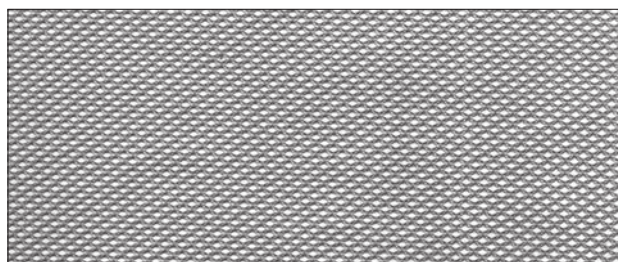

DL 2,5

DC 1,50


Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,35	0,20	0,750
0,30	0,30	1,000
0,30	0,40	1,300

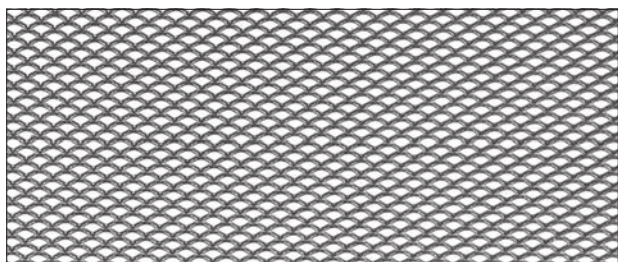

DL 3,5

DC 1,90

Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,40	0,30	1,050
0,40	0,40	1,350
0,40	0,50	1,700

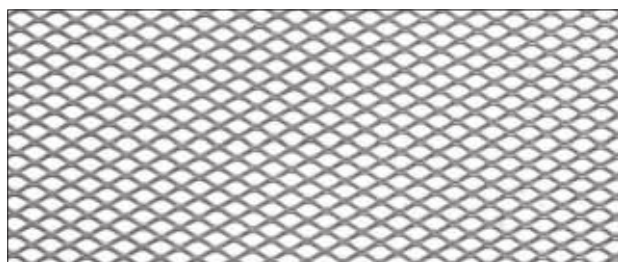


DL 5

DC 2,80

Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,60	0,30	1,050
0,60	0,40	1,400
0,60	0,50	2,000

DETAILS TECHNIQUES


DL= diagonale longue
DC= diagonale courte
AV= lanière
SP= épaisseur

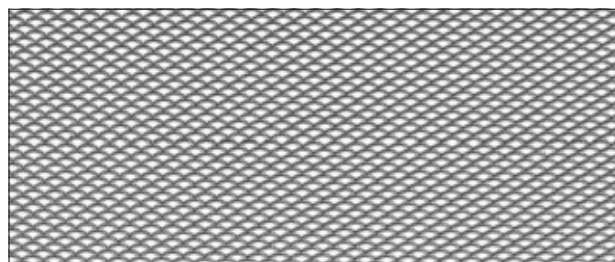

DL 3

DC 1,80


Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,40	0,30	1,100
0,40	0,40	1,450
0,40	0,50	1,800

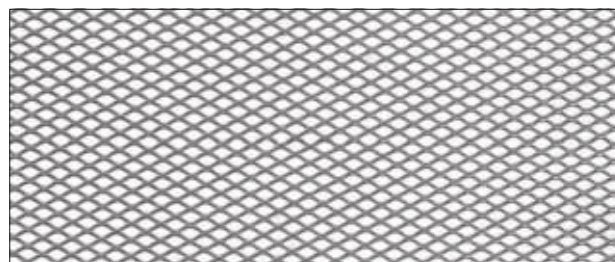

DL 4

DC 2

Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,50	0,30	1,200
0,50	0,40	1,600
0,50	0,50	2,000

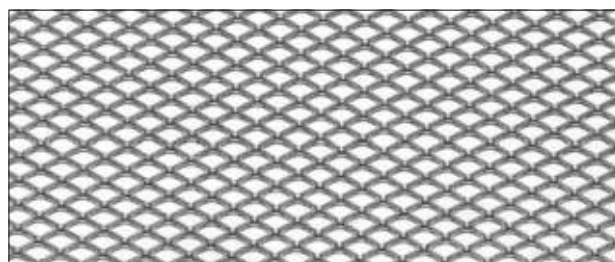

DL 6


DC 3,50

Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
0,70	0,40	1,300
0,70	0,50	1,600
0,75	0,60	2,100


LAMIERE STIRATE

EXPANDED METAL
METAL DEPLOYE


MAGLIA ROMBOIDALE

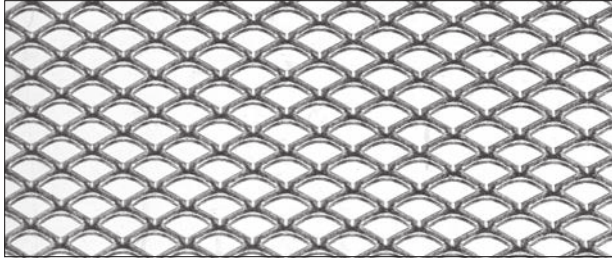


DL 8	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 4	0,80	0,50	1,600
	0,80	0,80	2,600
	0,80	1,00	3,200

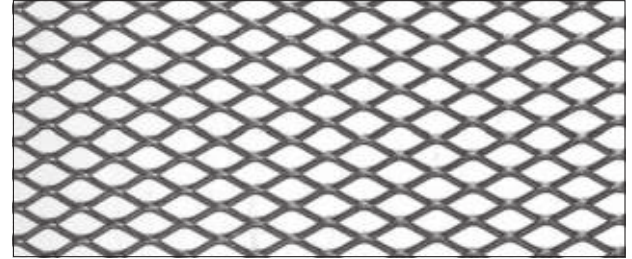

DL 10	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 5,80	1,00	0,50	1,400
	1,00	0,80	2,250
	1,00	1,00	2,800

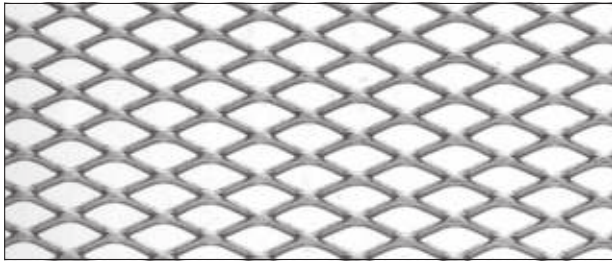

DL 12,5	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 6	1,00	0,50	1,350
	1,00	0,80	2,150
	1,00	1,00	2,700

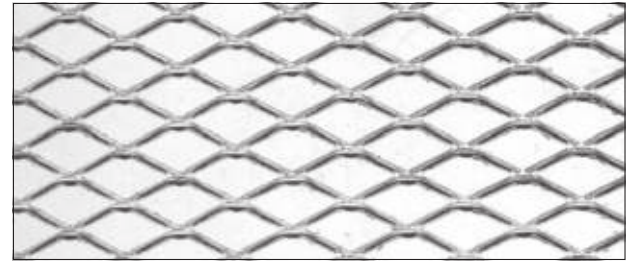

DL 16	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 8	1,5	0,50	1,500
	1,5	0,80	2,400
	1,5	1,00	3,000




DL 20	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 10	1,50	0,80	1,950
	1,50	1,00	2,400
	1,50	1,50	3,600




DL 28	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DC 10	1,50	0,80	1,950
	1,50	1,00	2,400
	1,50	1,50	3,600

RHOMBOIDAL MESH
MAILLE RHOMBOÏDE

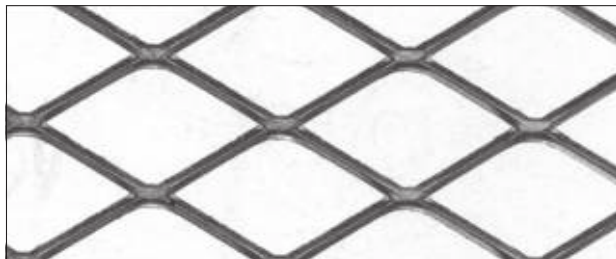

	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DL 35			
DC 17	1,50	0,80	1,150
	1,50	1,00	1,450
	1,50	1,50	2,150

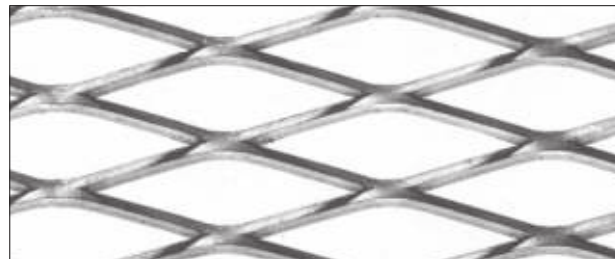

	Avanzamento av/mm	Spessore sp/mm	Peso per m ² /kg
DL 43			
DC 13	1,50	1,00	1,850
	2,00	1,50	3,700
	2,50	1,50	4,300

Misure espresse in mm - Dimensions in mm - Dimensions exprimées en mm

